
Quality and flexibility without compromise.

Up to 100 % rPET, inhouse flakes and pellets processable at guaranteed iV levels for direct food contact.

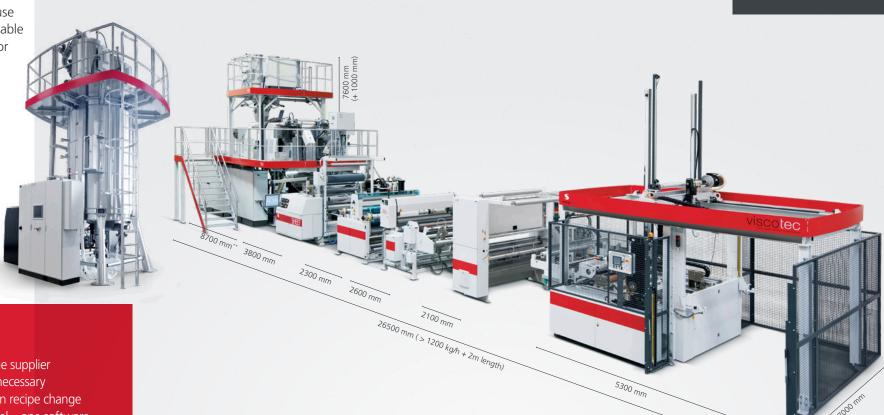

BENEFITS

- Entire solution one supplier
- No virgin material necessary
- Immediate effect on recipe change
- Master control panel one software
- Thickness range
- viscotec as your partner

VISCOSHEET

viscoSHEET ensures outstanding flexibility

in production with lowest energy consumption. Up to 100% rPET, inhouse flakes and pellets can be processed at guaranteed iV levels.

The continuous loss-in-weight gravimetric dosing guarantees immediate and flexible recipe changes during production. Our balanced way of extrusion and intelligent calendaring are the key for superior optical appearance and mechanical properties. Perfect interaction between modules results in a unique entire solution for outstanding product variety.



Starlinger & Co. Gesellschaft m.b.H.

A member of Starlinger Group

Austria 4113 St. Martin im Mühlkreis Adsdorf 38 N 48° 25′ 60″ | E 14° 2′ 33″

T: +43 7232 38170 E: viscotec.sales@starlinger.com www.viscotec.at www.starlinger.com

Choose your viscoSHEET Model:

Model****	1200	1200 HC	2000	2000 HC
Extruder Setup	125/65	145/65 (85)	165/65 (85)	215/85
Max. Extrusion Output***	1200kg/h	1600kg/h	2000kg/h	3000kg/h
Width	1200mm	1200mm	2000mm	2000mm
Input Materials***	PCR flakes, post-industrial regrind, pellets			
Thickness Range	150μm - 1800μm			

Above table represents general data and average values. We reserve the right of technical modifications.

- * 100% or material mixes
- ** production line also suitable for PP, PS, PLA
- *** output rates depending on input material
- **** customized configuration welcome upon technical clarification

